

Lumos 100 series

➤ Photometric information of Lumos 100 Series

Model	Beam angle			1m	2m	3m
Lumos 100MK 23W	No lens (85°)	Illumination	3200K	491 lux	124 lux	58 lux
			5600K	592 lux	152 lux	70 lux
		Beam diameter	Width	1.98 m	3.81 m	5.65 m
			Height	1.89 m	3.72 m	5.56 m
Lumos 100F 17W	No lens (85°)	Illumination	3200K	399 lux	106 lux	49 lux
			5600K	426 lux	110 lux	50 lux
		Beam diameter	Width	1.98 m	3.81 m	5.65 m
			Height	1.89 m	3.72 m	5.56 m

Lumos 100 MK

➤ Convenient, optimized for portable Lighting

- Equivalent of 150W tungsten
- Adjustable color Temperature (3200~5600K)
- Flicker Free
- Stable dimming (0%~100%)
- 12~24V DC
- Digital FND display
- Lumos Li-ion battery holds up to 2 hours
- D-tap Supports Anton Bauer(Gold-mount) or V-mount battery




➤ Photometric information of Lumos 100MK

CCT	4 ft	8 ft	12 ft	1m	2m	3m
3200K	30.7 fc	7.7 fc	3.6 fc	491 lux	124 lux	58 lux
5600K	37 fc	9.5 fc	4.3 fc	592 lux	152 lux	70 lux

➤ Lumos 100MK Specifications

Power Consumption	23W	
Size	W220.4 * H86 * L30 (mm) / W8.7 * H3.4 * L1.2 (inch)	
Weight	486 g / 1.1 lb	
Color Temperature	3200~5600K	
E. Characteristics	AC 100~240V / 50~60Hz	
Input Voltage	12~24V DC (Free volt)	
Dimming	0~100% Manual	
Color Control	Manual	
Flicker	Flicker free	
Operating Temp.	0°C ~ 45°C	
Accessory	4-leaf barndoor D-Tap cable Lumos-100 battery	
Color temperature	3200K	5600K
CCT Tolerance	±150K	±150K
CRI	97 Ra	95 Ra

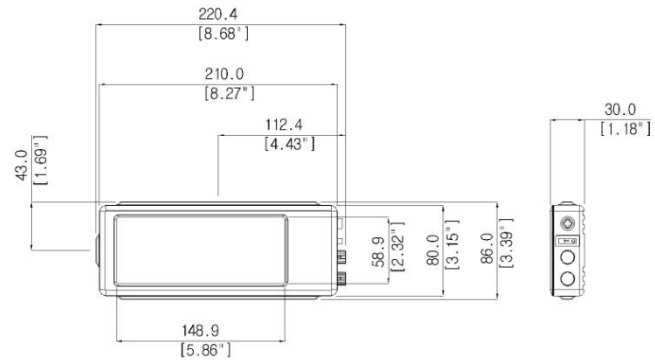

Lumos 100 F

➤ Portable Lighting

- Flicker Free
- Stable dimming (0%~100%)
- Lumos Li-ion battery holds up to 2 hours
- D-tap Supports Anton Bauer(Gold-mount) or V-mount battery



➤ Photometric information of Lumos 100F

CCT	4 ft	8 ft	12 ft	1m	2m	3m
3200K	24.9 fc	6.6 fc	3 fc	399 lux	106 lux	49 lux
5600K	26.6 fc	6.8 fc	3.1 fc	426 lux	110 lux	50 lux

➤ Lumos 100F Specifications

Power Consumption	17W	
Size	W218 * H88 * L37.8 (mm) / W8.6 * H3.5 * L1.5 (inch)	
Weight	476 g / 1.0 lb	
Color Temperature	3200 or 5600K	
E. Characteristics	AC 100~240V / 50~60Hz	
Input Voltage	24V DC	
Dimming	0~100% Manual	
Color Control	N/A	
Flicker	Flicker free	
Certifications	CE	
Operating Temp.	0°C ~ 45°C	
Accessory	Lumos-100 battery	
Color temperature	3200K	5600K
CCT Tolerance	±150K	±150K
CRI	97 Ra	95 Ra

